



SIMPLICITY.
PERFORMANCE.
VALUE.












MaveriX Terminals

- 7" and 10" high-definition touch screen with pinch to zoom capability
- New User Interface for intuitive handling and customer experience
- Tablet like operation
- Customizable widgets allow the user to define their own screen layout based on preference and operation
- Up to 6 working screen layouts can be saved and changed on the fly
- Detailed 3D machine models and advanced viewing angles
- Easily connected with built in WiFi to support for over-the-air SW updates and RTK NTRIP corrections without the need for additional hardware

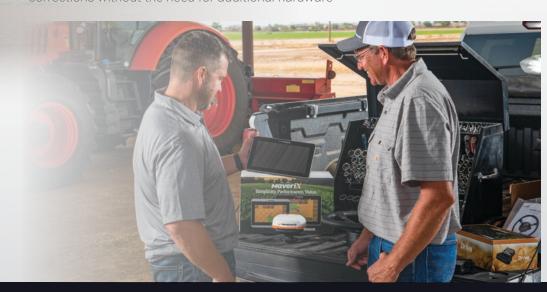



Outback

Outback



A631

SIMPLICITY. PERFORMANCE. VALUE.

MaveriX Autosteer





- Easy, multi-step calibration process to support end customer installation
- Integrated valve driver to utilize hydraulic retrofit and OEM valves without the need for additional hardware
- Supports Straight, Contour, AB-Contour and Circle Pivot steering modes
- Integrates Shuttle Shift and reverse steering capabilities
- Features eTurns for automated headland turns
- Easy installation with over 1,500 models covered
- · Facilitates precise steering tasks such as tillage, spraying, harvesting, spreading, planting, bedding and nutrient placement





MaveriX Smart Antenna

- All-in-one, Triple-Frequency, Multi-GNSS Receiver Solution
- Tracks GPS, GLONASS, BeiDou, Galileo and QZSS constellations
- Fast start up and reacquisition times with scalable accuracy
- Interference Mitigation technology
- Supports Atlas Global Correction Service for improved performance and repeatability over SBAS
- Available dual serial, NMEA 2000/CAN, and GSI pulse output interface options
- RTK Upgrade Option compatible with A631 RTK base station and cellular RTK networks

Guidance

Harvesting

· Spreading

Tillage

Spraying


· Yield Mapping

Atlas Global Correction Service

- Industry-leading GNSS-based global L-band correction service
- Provides robust performance at market-leading prices
- Flexible and scalable service
- Auto Seed feature eliminates long convergence times

MaveriX Electric Wheel eDriveESi² • Combined with eDriveM1, delivers accurate automated steering performance Simple installation Easy calibration Model specific kits allow for quick installation by the grower Whisper quiet/high torque electric wheel works on even the hardest to steer vehicles

GNSS Performance





• Planter Section

· Controlled Traffic

Row Planting

Control

- · Guidance Harvesting
- · Broad Acre Seeding · Spreading
 - Tillage
- · Planter Section Control
- · Variable Rate Application

Atlas® Broad-Acre

20"

Sprayer Section

Control

Swathing

Planting

1.6"

· Broad Acre Seeding Swathing

- Planting
- Yield Mapping
- Spraying · Variable Rate
- Application · Sprayer Section

R95 Horizontal, typical <30 minutes




ear-to-Year

Pass-to-Pass Accuracy



- Guidance · Broad Acre Seeding Harvesting Swathing
 - Planting
- · Spreading • Planter Section Yield Mapping Control Tillage
- Controlled Traffic Spraying
- Row Planting Variable Rate
- Strip-Till Application Sprayer Section Hipping/Bedding

R95 Horizontal, typical 2 minutes convergence time



40" 12"

Variable Rate

Application

Control

Swathing

· Sprayer Section

· Broad Acre Seeding

Guidance


Harvesting

Spreading

Tillage

Spraying

· Yield Mapping





A631

Maverix RTK Base

- Utilizes A631 All-in-one, Triple-Frequency, Multi-GNSS Receiver Solution
- Tracks and provides corrections for GPS, GLONASS, BeiDou, Galileo and QZSS constellations
- Fast start up and acquisition times
- Easy setup and configuration with mobile device (Smartphone or Tablet) using WiFi interface
- 900 MHz radio for license free communication
- Mobile use with carrying case and external battery
- Ideal solution to provide customer owned corrections for MaveriX Sub Inch system
- Can be combined with another A631 as rover for tile plows and ditching applications











Maverix Application Control

- Single product rate control
- Up to 10 section autoboom shutoff
- Variable rate compatible
- Controls liquid, dry and anhydrous ammonia
- Simple auto calibration procedure
- Works seamlessly with STX, MAX, REBEL AND MaveriX terminals
- Integrated rate and section control eliminates cab clutter









MaveriX

Outback Return on Investment

As this chart demonstrates, the return on investment with an Outback Guidance system in a single season can be dynamic. Don't miss this opportunity to witness this first hand.

Putting Return on Investment in Perspective.

Crop	Input CPA	3% Error on 500 Acres	3% Error on 1,500 Acres	3% Error on 3,000 Acres
Corn	\$300.00*	\$4,500.00	\$13,500.00	\$27,000.00
Soybean	\$200.00*	\$3,000.00	\$ 9,000.00	\$18,000.00
Wheat	\$175.00*	\$2,625.00	\$ 7,875.00	\$15,750.00
Canola	\$225.00*	\$3,375.00	\$10,125.00	\$20,250.00

Today's agricultural input costs require a new level of accuracy and accountability. In the past, what were perceived as simple "skips" or "overlaps" when spraying, planting or tilling could quickly end up costing you thousands and thousands of dollars.

As the chart above demonstrates, adding an Outback® Guidance system and receiving a modest 3% improvement in error will easily return the costs of the system in the very first season of use. We like to think of it as Outback Economics.

*Input cost estimate based upon 2018 crop input data







Auto Steer



Application Control



Precision

Your Outback Guidance Representative



Outback Guidance

A Division of Hemisphere GNSS 2207 Iowa Street
Hiawatha, Kansas 66434 USA
Toll Free 800-247-3808 USA
Toll Free 866-888-4472 Canada
OutbackGuidance.com
OutbackMayerix.com

